


KA BAND DIPLEXER(Circular POL)

Technical Specification

Operating Frequency, GHz	TWO-PORT	
	RX	TX
	19.2-21.2	29.0-31.0
Polarization	Circular	Circular
VSWR	1.20:1	1.20:1
Insertion Loss, dB	≤0.25dB	≤0.20dB
Interface	BJ220	BJ320
Isolation, Tx/Rx, dB	≥85dB	
Standard and Option		
Pressurization	No or Customized	
Material	Aluminum Casting or Customized	
Exterior	White paint or Customized	

Test Data

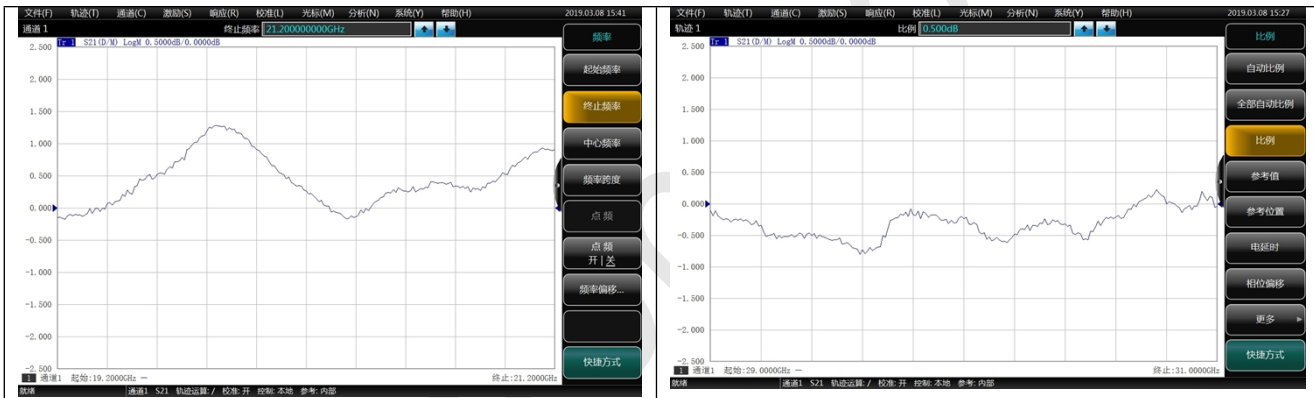

Outline Drawing

